

PRODUCT DETAILS



URINAL / PRIVACY SCREEN – PEDESTAL MOUNTED




Designed by TPI, the Pedestal Mounted Urinal Divider/Privacy Screen combines an uncluttered line with easy-to-clean accessibility at the floor. Engineered to stand strong, the open spaces of this cubicle allow it to sit well in tight rooms. Recommended for offices and restaurants, light, airy and easy to clean.

Urinal Dividers are an important fixture in the commercial washroom environment. TPI offers its own range of Privacy Screens that can be used as Urinal Dividers and as room dividers for visual privacy.


Our Privacy Screens (Urinal Dividers) are based on our most popular Cubicle designs and come in a wide range of colours and materials all suitable for use in commercial washrooms, including public toilets, schools, office environments and many more.

Additional Information

Standard Dimensions	Height: Up to 1800mm maximum Depth: 600mm maximum Floor Clearance: 200mm
Material Options	13mm Compact Laminate 18mm Laminated Board 32mm Laminated Board 19mm Designboard 10mm Acrylic
Pedestal Legs	Standard 200mm Stainless Steel leg (d 32mm) 100mm Aluminium leg (d 32mm) - optional black leg
Aluminium Profile	Square Clear Anodised Square Powdercoated
Country of Manufacture	Australia

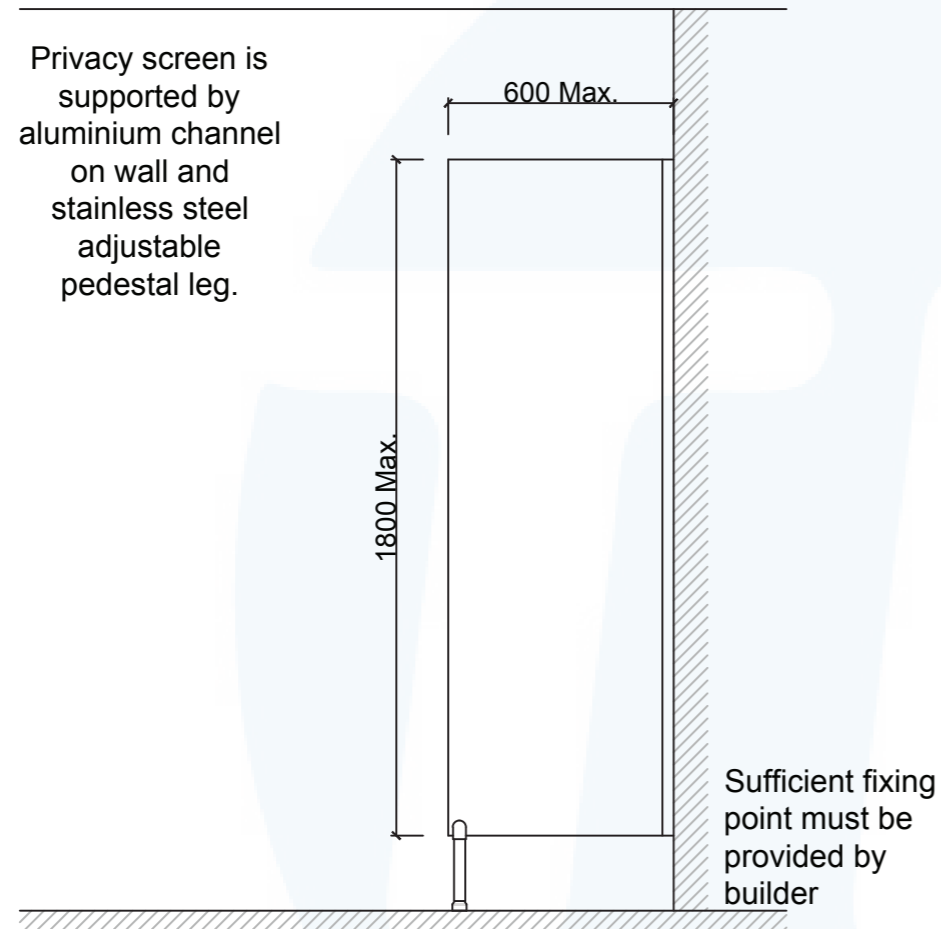

○ Pedestal Leg Support

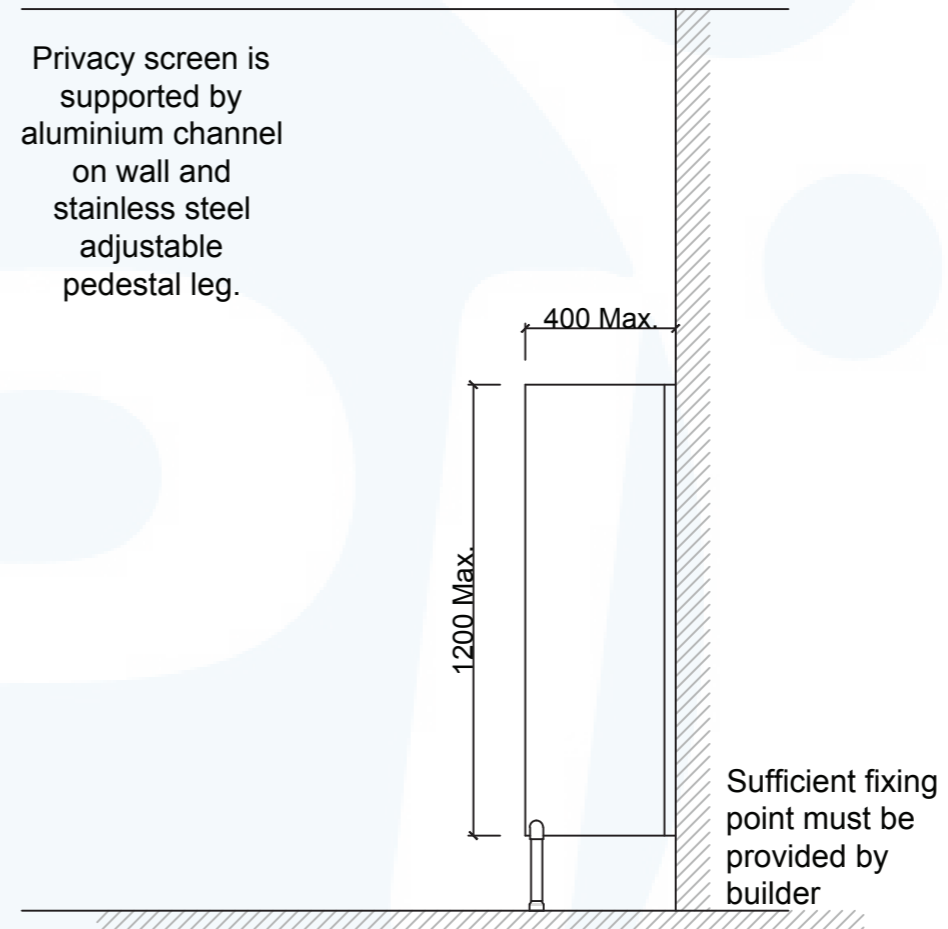

○ Pedestal Leg Support
Detail for Acrylic sheet option only

SYSTEM

Pedestal Leg Support

MATERIAL AVAILABILITY

- 13mm Compact Laminate
- 18mm Laminated MR MDF
- 18mm Timber Veneer
- 19mm Nuvex Saniboard
- 32mm Laminated MR MDF
- 32mm Timber Veneer
- 13mm Acrylic Sheet

NOTES:

ALL FIXINGS SCREWS ARE 304 GRADE STAINLESS STEEL

NOT TO SCALE

FIGURED DIMENSIONS ARE NOMINAL ONLY. DO NOT SCALE OFF DRAWING. THIS DESIGN IS COPYRIGHT AND MAY NOT BE USED WITHOUT THE WRITTEN PERMISSION OF THE DESIGNER

DRAWING

TPI-P DETAILED DESIGN
Pedestal Leg Privacy Screen

ISSUE / REVISION: 03

DWG NO.

TPI-1101-P

DATE DRAWN 22.6.17

DRAWN BY CAP

APPROVED BY:

